



Podet Km 0+458

VEDERE PLANA B-B
Sc. 1:50

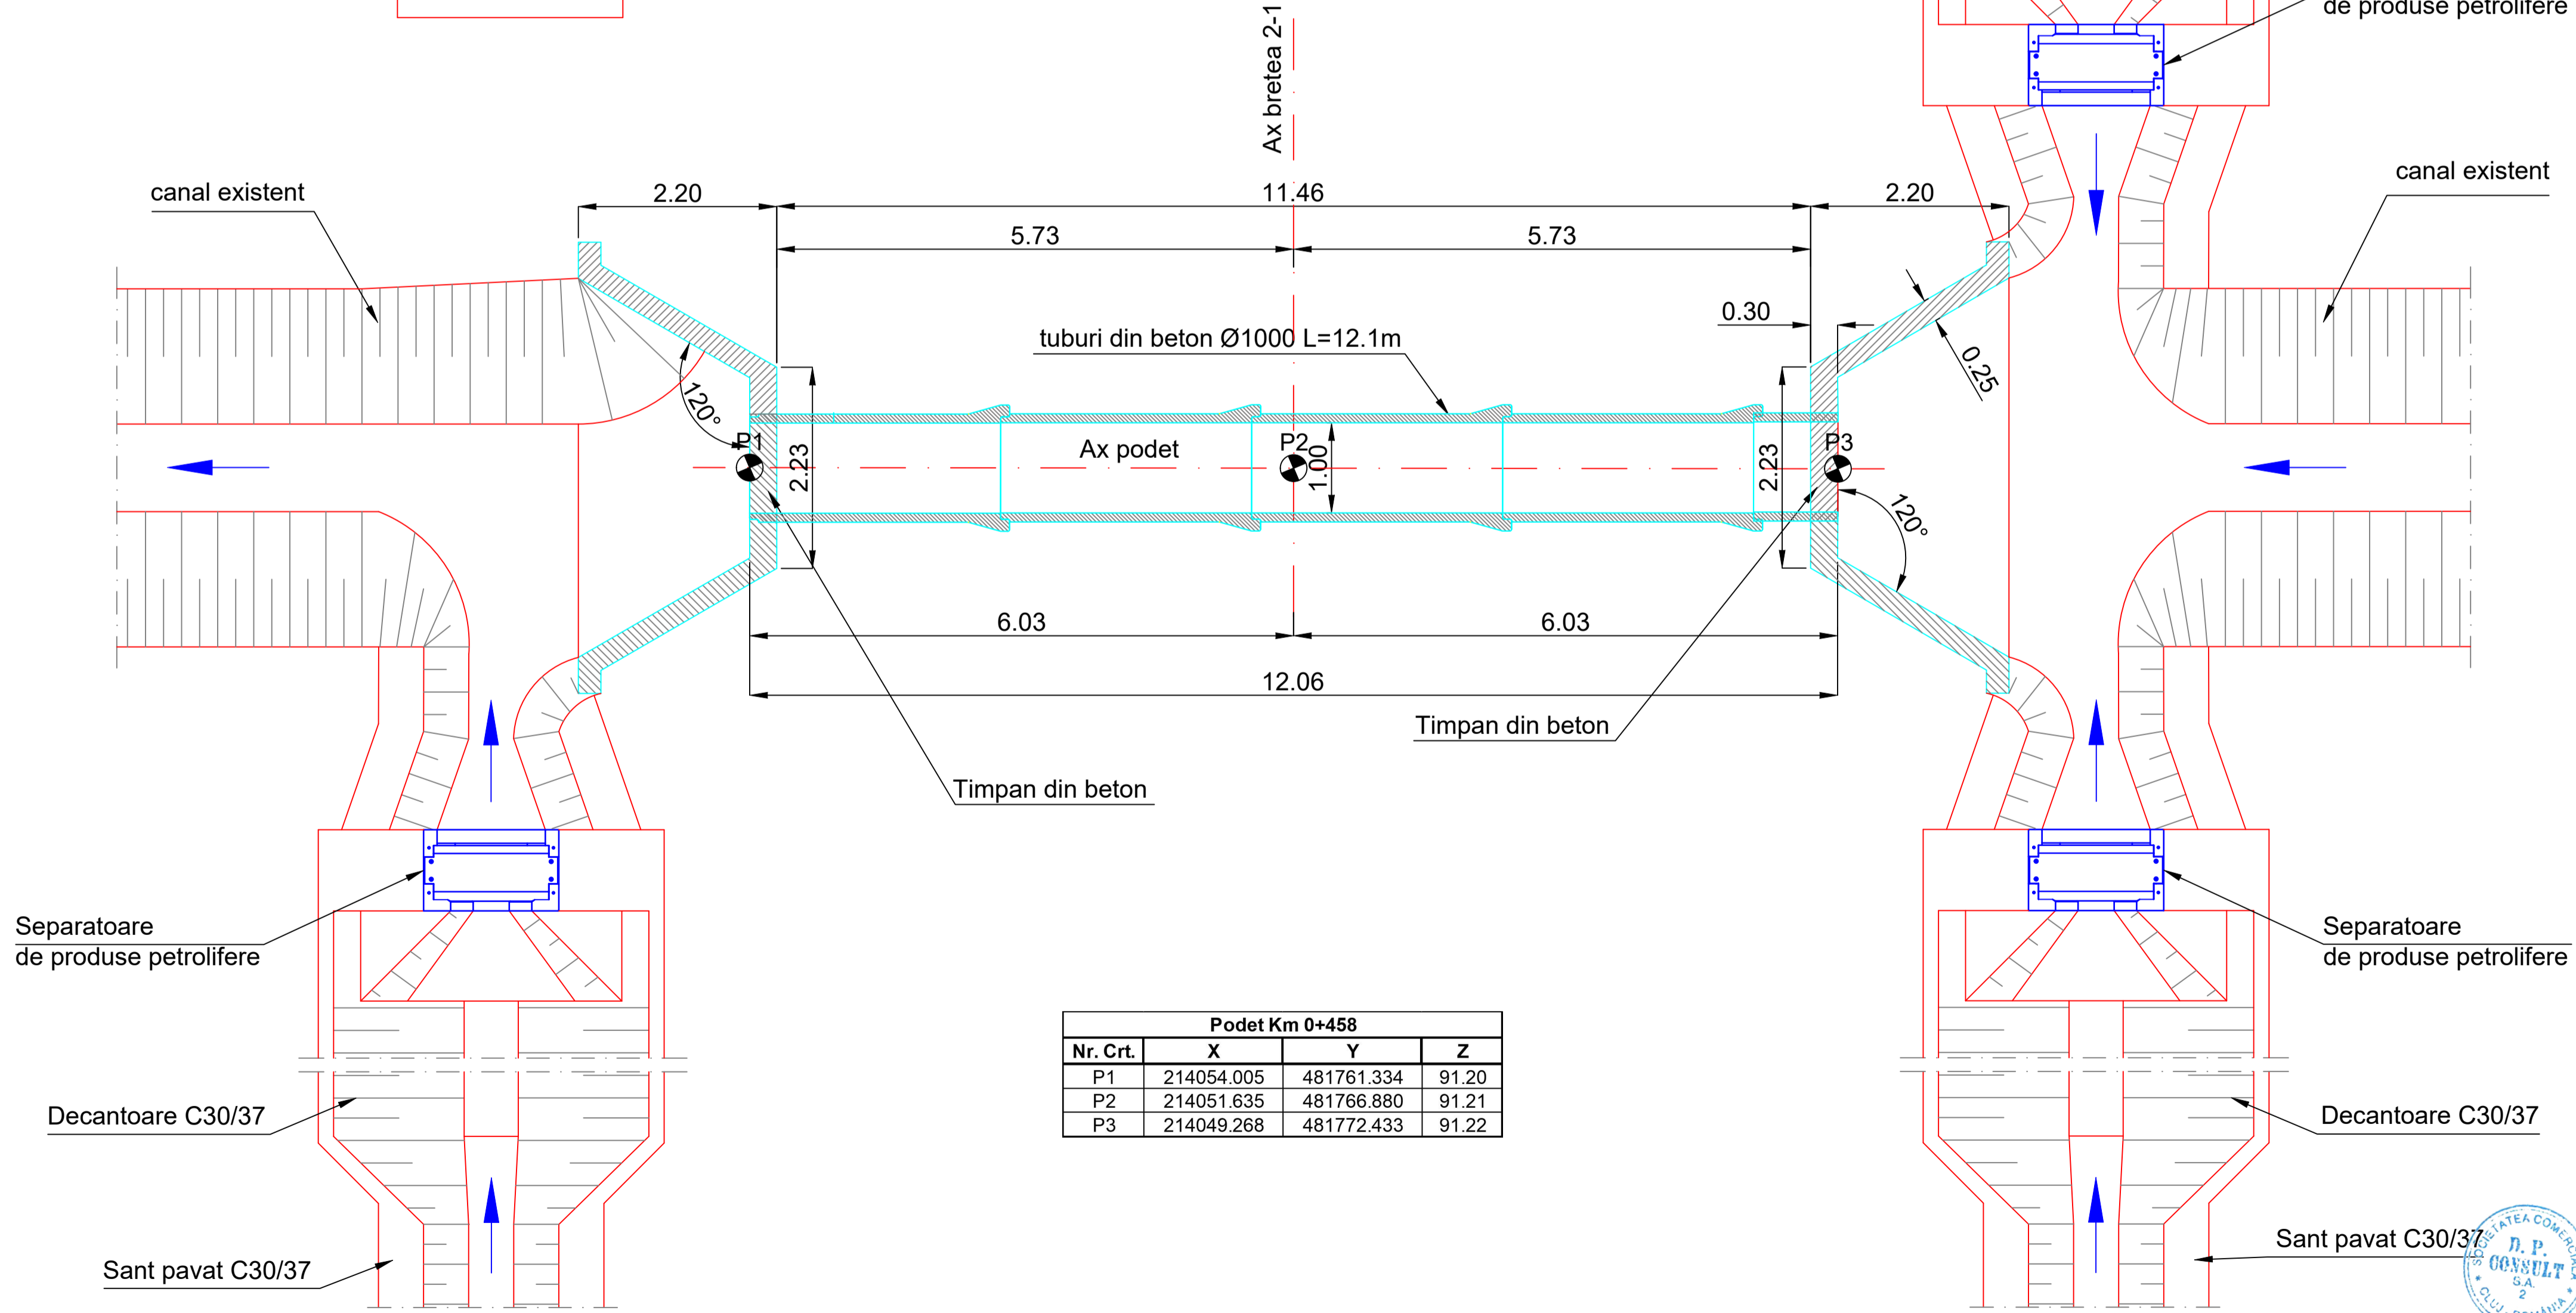

Podet Km 0+458			
Nr. Crt.	X	Y	Z
P1	214054.005	481761.334	91.20
P2	214051.635	481766.880	91.21
P3	214049.268	481772.433	91.22

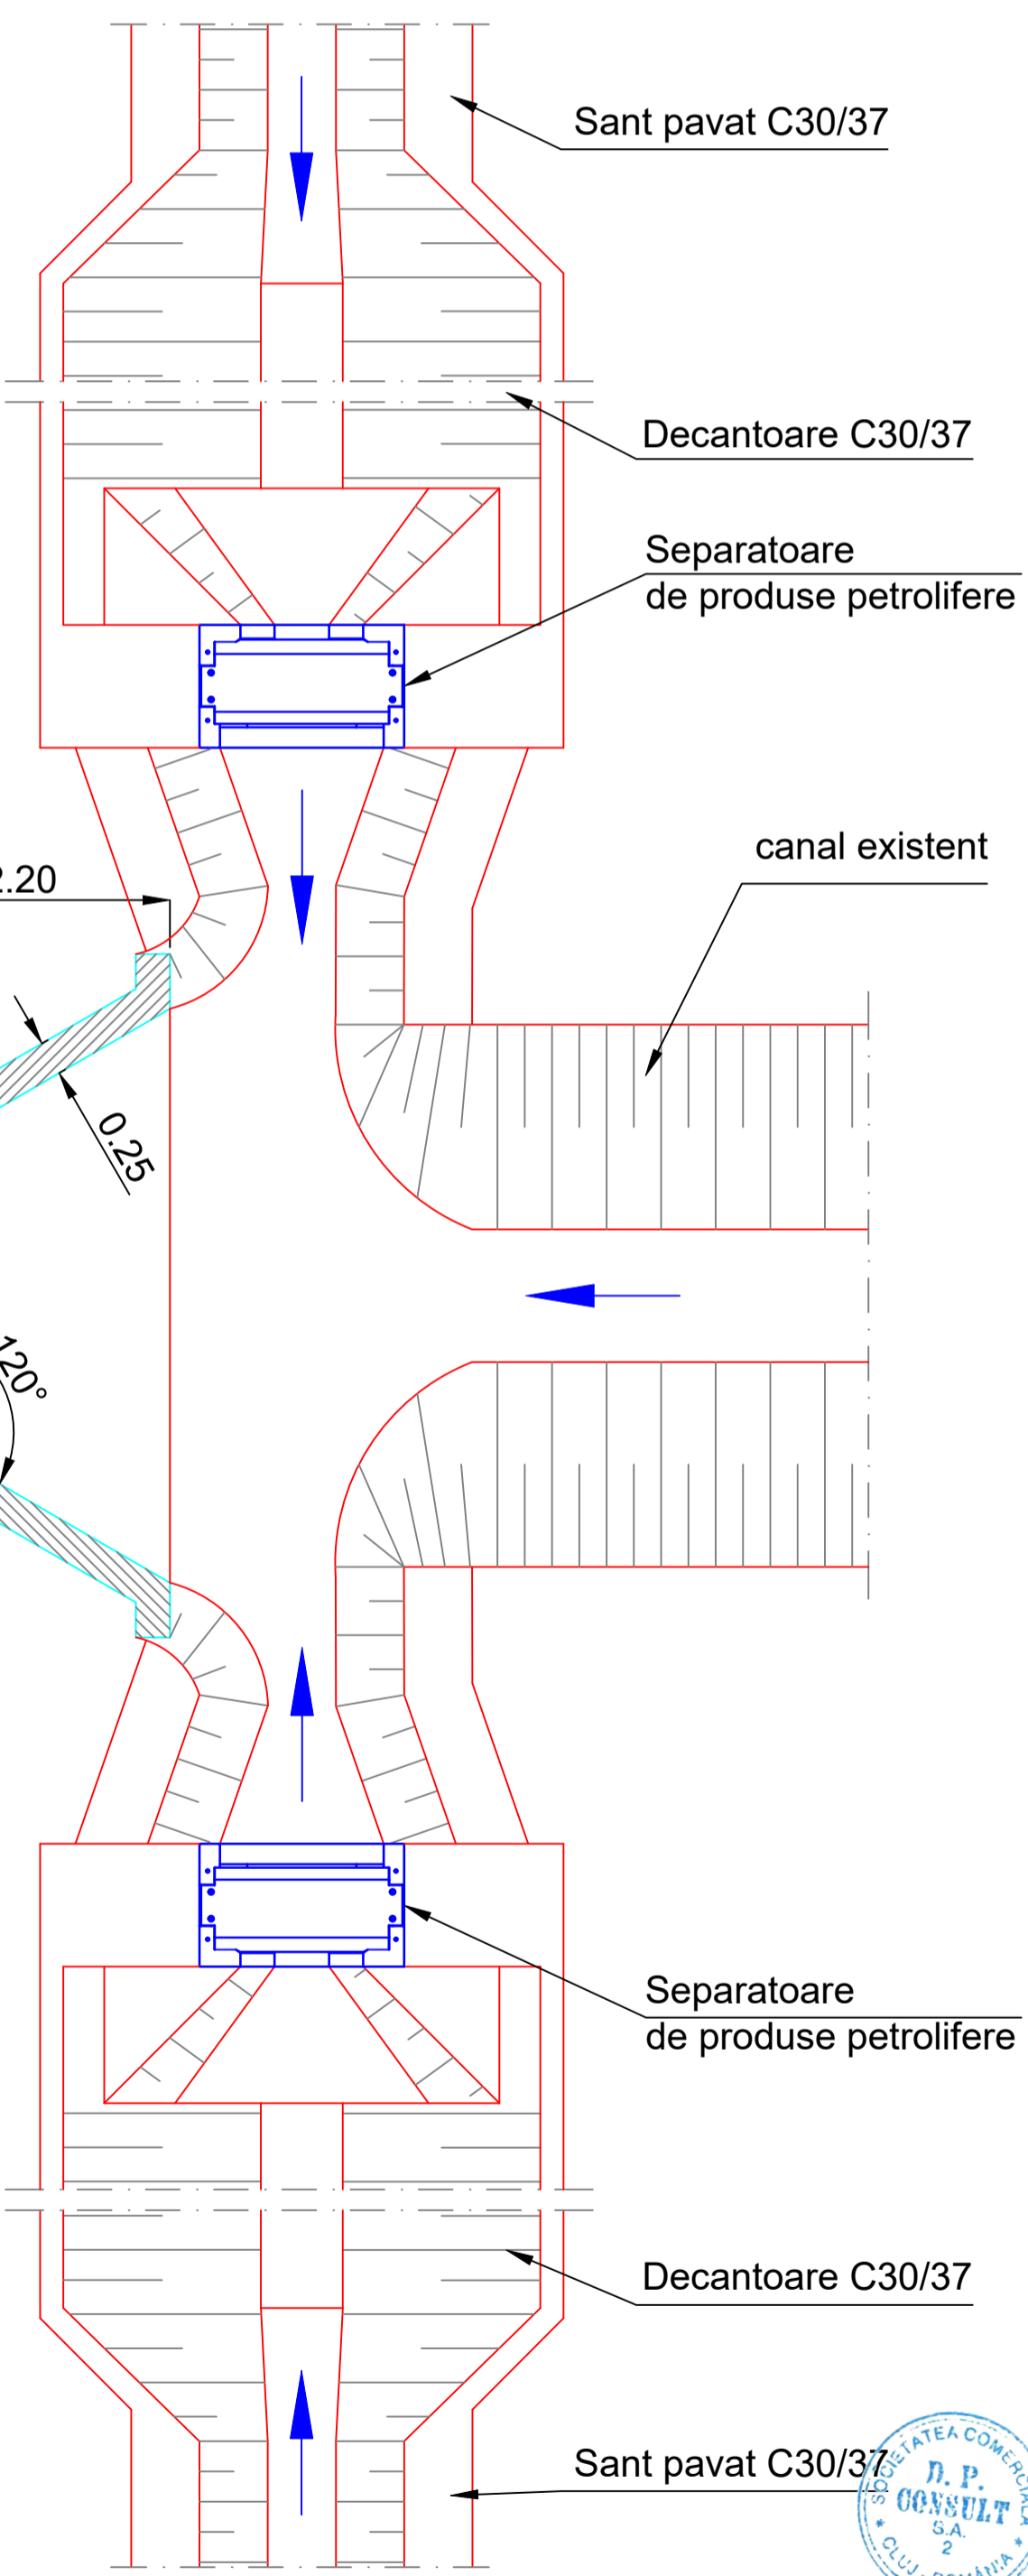

Caracteristicile betoanelor utilizate pentru elemente prefabricate de podete:
Referinta la normativul NE 012-1:2022/standardul SR EN 206-1

- Clasa de rezistenta la compresiune	C30/37
- Clasele de expunere (min)	XC4+XD1+XF4
- Dozaj minim de ciment (min)	340 kg/mc
- Tip ciment conf. SR EN 197-1:2011	CEM I; SRI; I-A 52.5, 42.5; CEM II: A/B-S, HIIA-S, A-LL;
- Raport apa/ciment (max)	0.5


Caracteristicile betoanelor utilizate pentru beton pereu:
Referinta la normativul NE 012-1:2022/standardul SR EN 206-1

- Clasa de rezistenta la compresiune	C25/30
- Clasele de expunere (min)	XF2
- Dozaj minim de ciment (min)	300 kg/mc
- Tip ciment conf. SR EN 197-1:2011	CEM I; SRI; I-A 52.5, 42.5; CEM II: A/B-S, HIIA-S, A-LL;
- Raport apa/ciment (max)	0.55a

Caracteristicile betoanelor utilizate pentru beton de poza fundatii podete:
Referinta la normativul NE 012-1:2022/standardul SR EN 206-1

- Clasa de rezistenta la compresiune	C16/20
- Clasele de expunere (min)	XC2
- Dozaj minim de ciment (min)	260 kg/mc
- Tip ciment conf. SR EN 197-1:2011	CEM I; SRI; I-A 52.5, 42.5; CEM II: A/B-S, HIIA-S, A-LL;
- Raport apa/ciment (max)	0.60

SECTIUNE A-A
Sc. 1:25

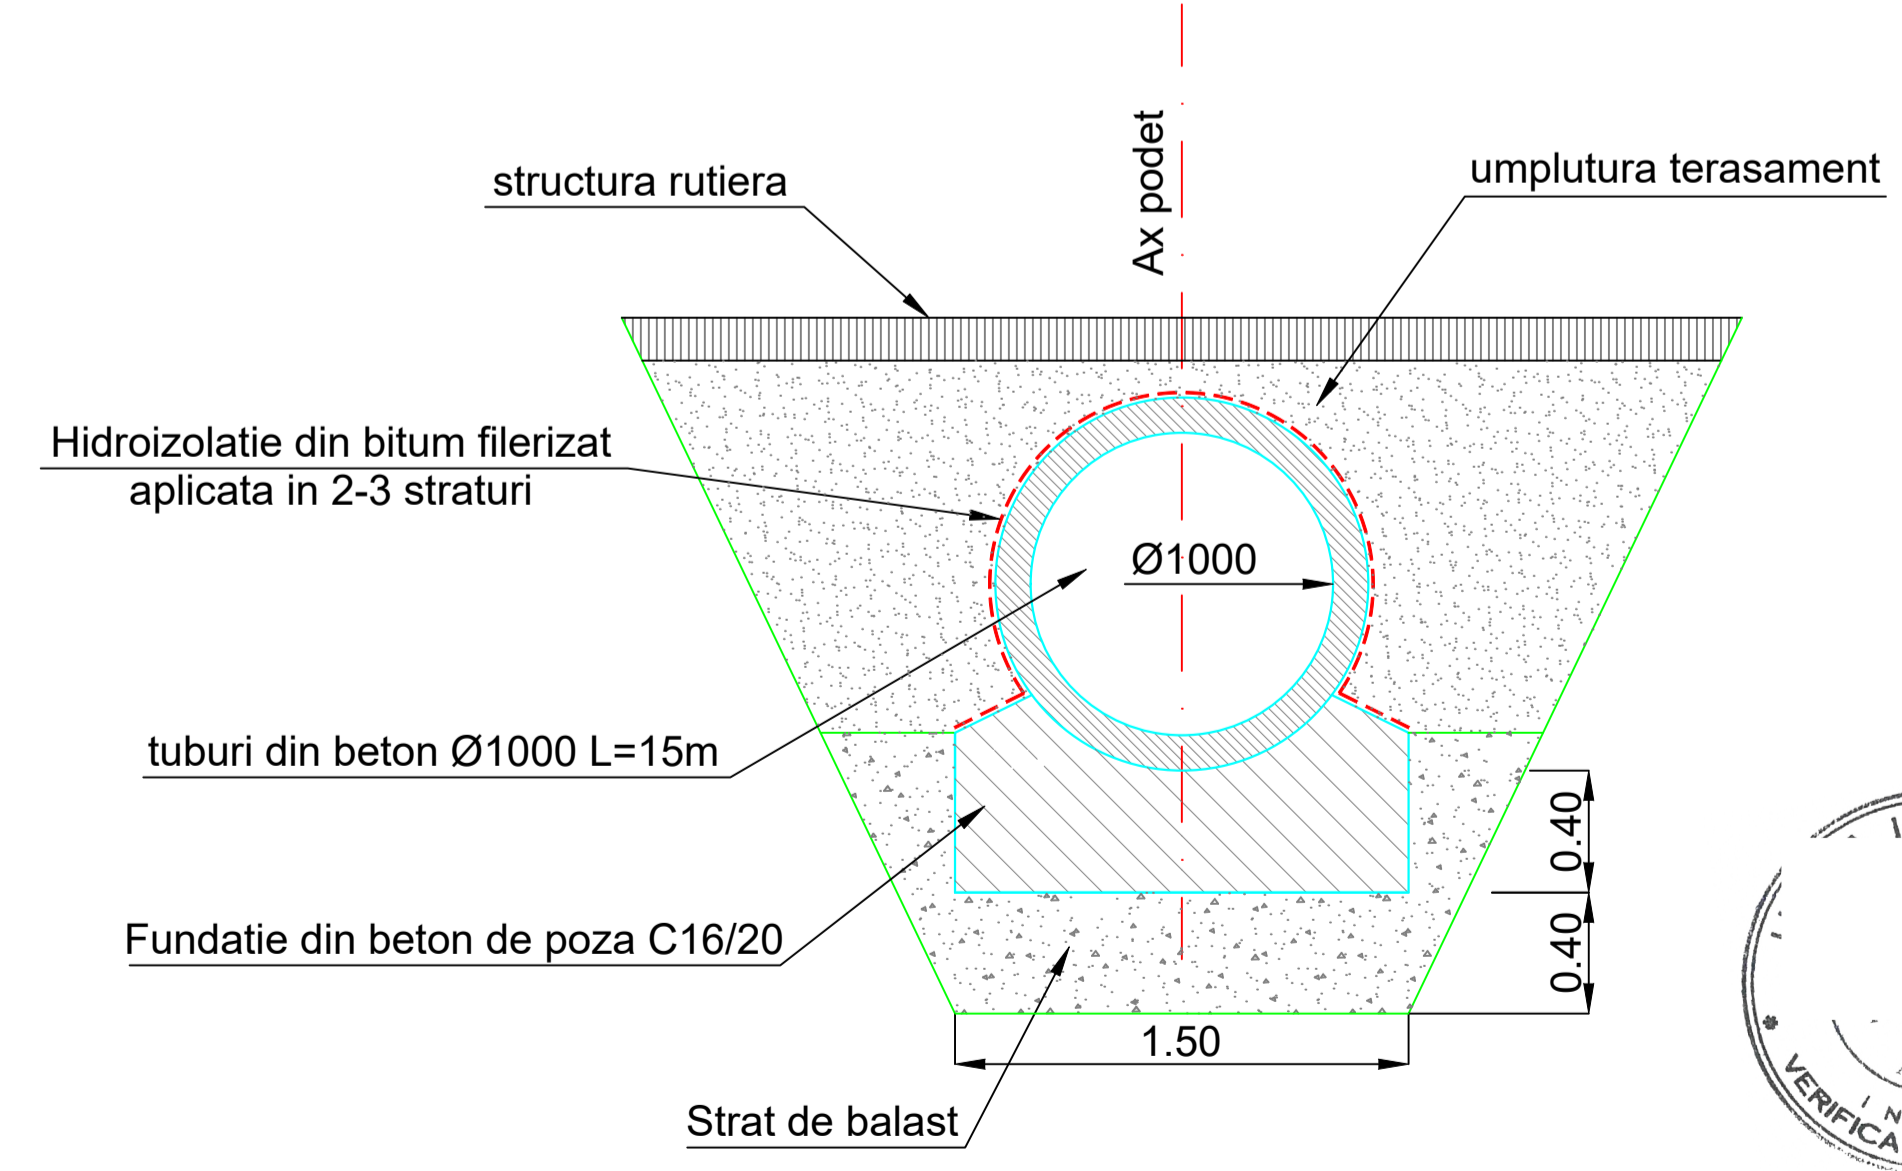

INVESTITOR
CORPORATIA NATIONALA DE ADMINISTRARE
INFRASTRUCTURI ROTARE

PROIECTANT GENERAL
D.P. CONSULT S.A.

AMPLASAMENT

DENUMIRE PROIECT
PROIECTARE SI EXECUTIE
"VARIANTA DE OCULIRE
TIMISOARA SUD"
ELABORARE PROIECT TEHNIC
REST DE EXECUTAT

NUMAR CONTRACT : 550/36/09.02.2023

NUMAR PROIECT : 556

FAZA PROIECT
PROIECT TEHNIC
REST DE EXECUTAT

Data : 03.2023

VERIFICATOR TEHNIC

Manager de Proiect
Ing. Silvan Moldovan

Sef Echipa Proiectare
Ing. Raul Cocs

Inginer Proiectant Poduri
Ing. Attila Takacs

Inginer Proiectant Drumuri
Ing. Valentin Oaida

REVIZII			DENUMIRE PLANSA
NR. REV.	DATA	SEMNA.	
			PODET km 0+458 Nod rutier DN6 Bretea 2-1
			Scara : 1:50
			NUMAR PLANSA
			556-VOTM-PO-49