


Podet Km 0+031

Podet Km 0+031			
Nr. Crt.	X	Y	Z
P1	210423.974	474761.951	88.45
P2	210420.181	474758.615	88.50
P3	210415.711	474754.689	88.54

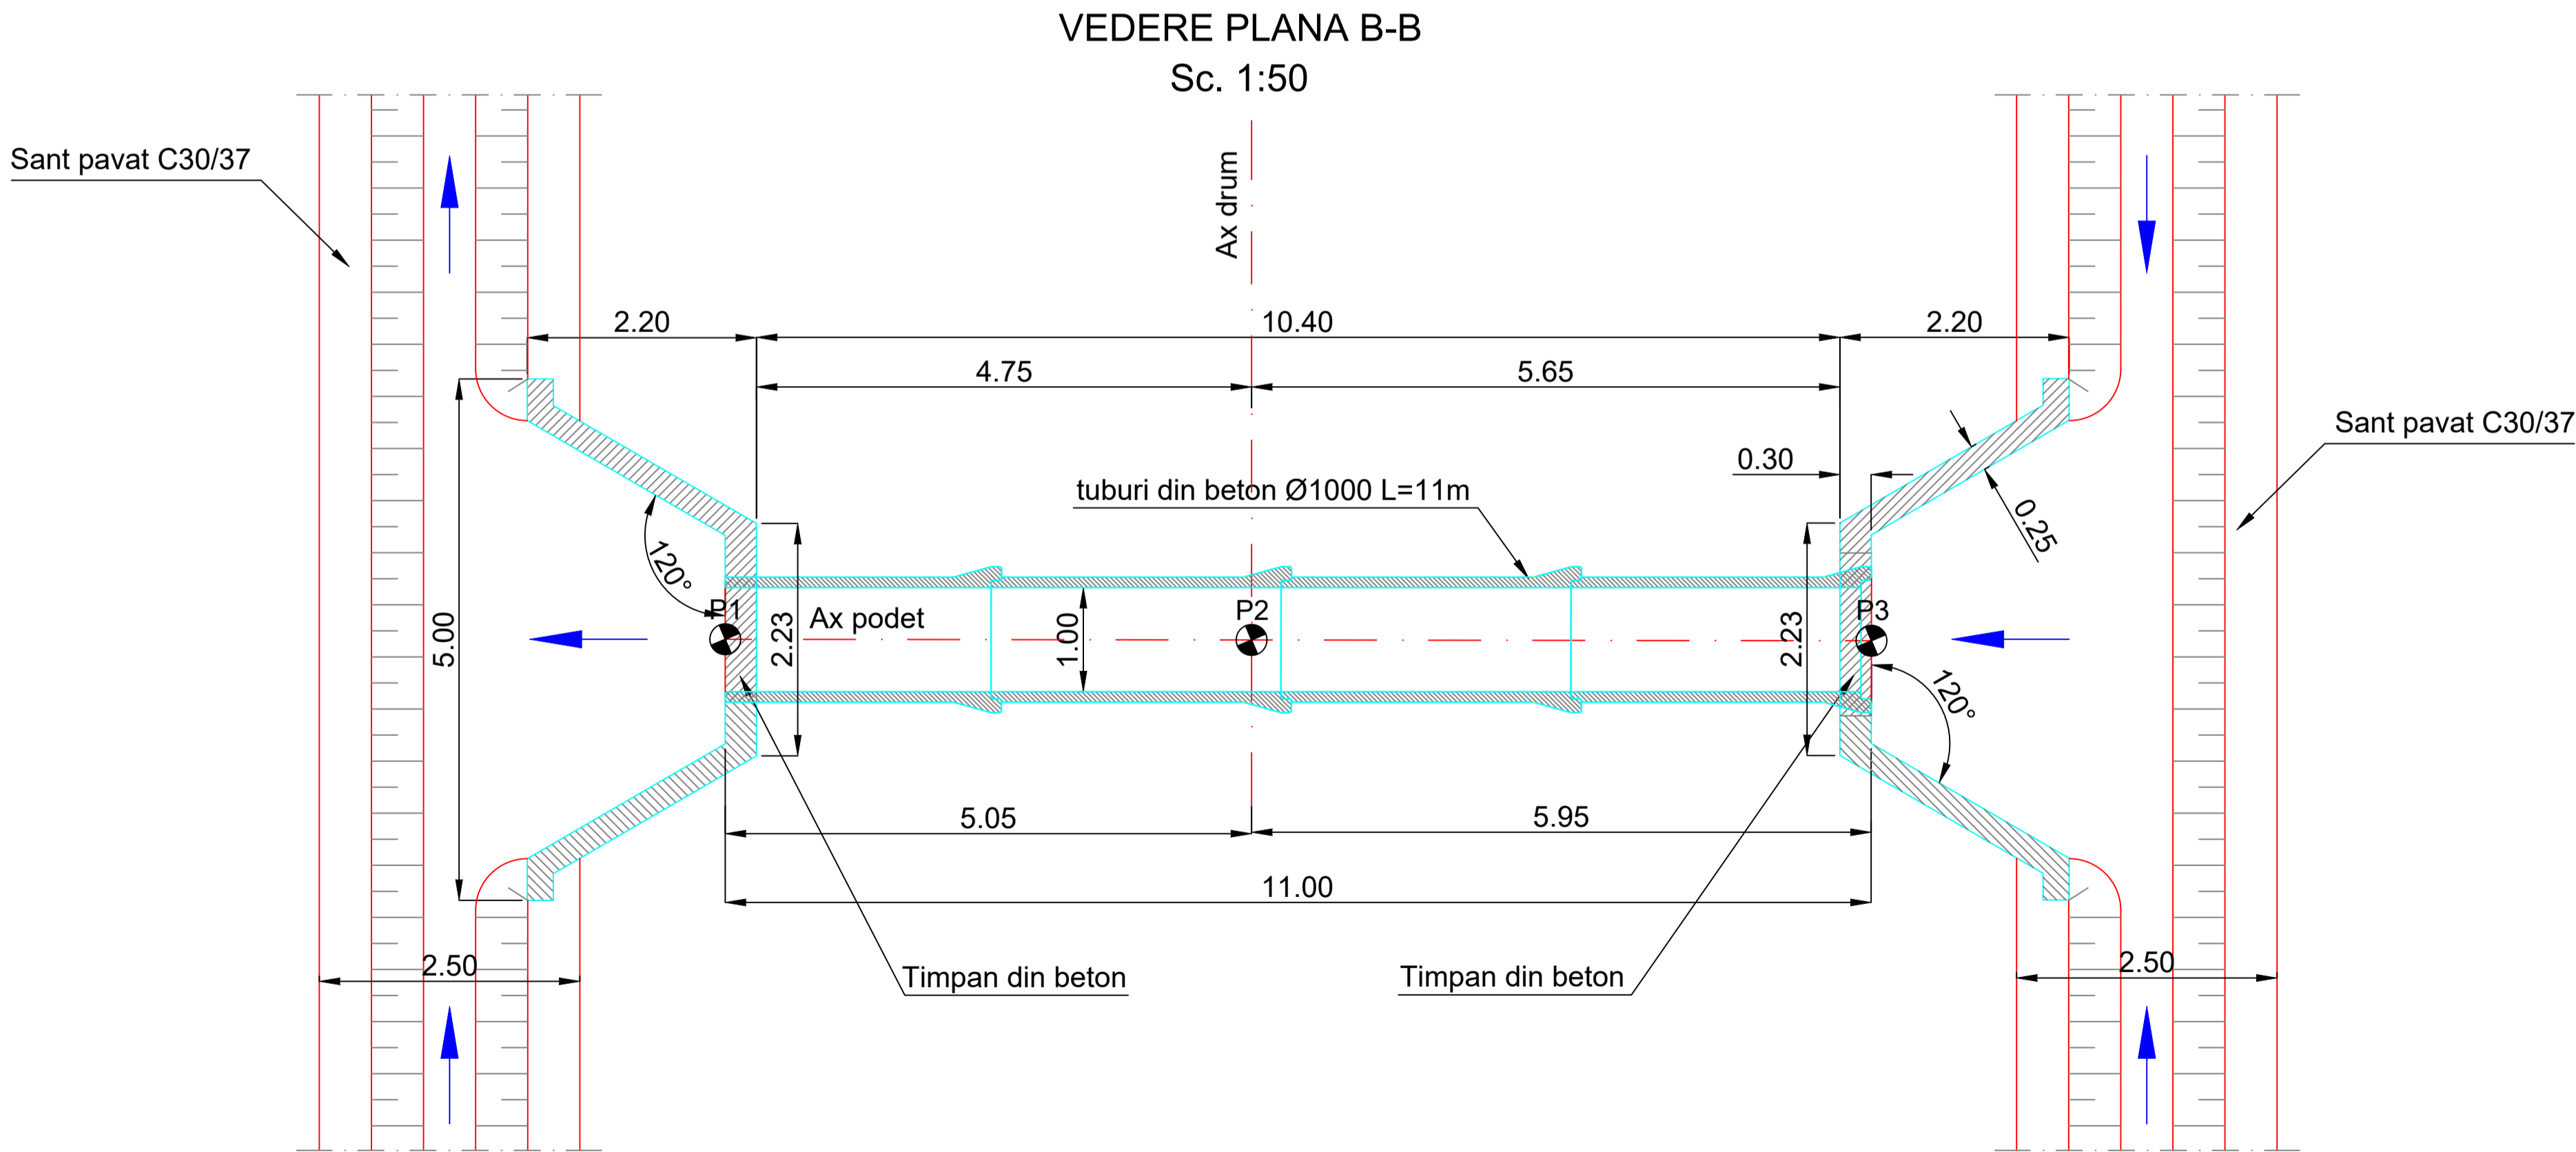

Caracteristicile betoanelor utilizate pentru elemente prefabricate de podete:

Referinta la normativul NE 012-1:2022/standardul SR EN 206-1

- Clasa de rezistenta la compresiune	C30/37
- Clasele de expunere (min)	XC4+XD1+XF4
- Dozaj minim de ciment (min)	340 kg/mc
- Tip ciment conf. SR EN 197-1:2011	CEM I; SRI; I-A 52.5, 42.5; CEM II: A/B-S, HIIA-S, A-LL;
- Raport apa/ciment (max)	0.5

Caracteristicile betoanelor utilizate pentru beton pereu:


Referinta la normativul NE 012-1:2022/standardul SR EN 206-1

- Clasa de rezistenta la compresiune	C25/30
- Clasele de expunere (min)	XF2
- Dozaj minim de ciment (min)	300 kg/mc
- Tip ciment conf. SR EN 197-1:2011	CEM I; SRI; I-A 52.5, 42.5; CEM II: A/B-S, HIIA-S, A-LL;
- Raport apa/ciment (max)	0.55a

Caracteristicile betoanelor utilizate pentru beton de poza fundatii podete:

Referinta la normativul NE 012-1:2022/standardul SR EN 206-1

- Clasa de rezistenta la compresiune	C16/20
- Clasele de expunere (min)	XC2
- Dozaj minim de ciment (min)	260 kg/mc
- Tip ciment conf. SR EN 197-1:2011	CEM I; SRI; I-A 52.5, 42.5; CEM II: A/B-S, HIIA-S, A-LL;
- Raport apa/ciment (max)	0.60

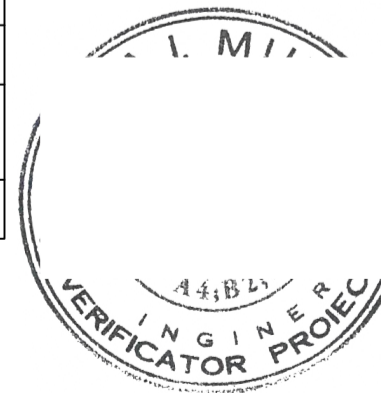

INVESTITOR COMPANIA NATIONALA DE ADMINISTRARE INFRASTRUCTURI RUTIERE S.A.	PROIECTANT GENERAL D.P. CONSULT S.A.	AMPLASAMENT Harta de localizare a podetului pe traseul rutier.	DENUMIRE PROIECT PROIECTARE SI EXECUTIE "VARIANTA DE OCULIRE TIMISOARA SUD" ELABORARE PROIECT TEHNIC REST DE EXECUTAT NUMAR CONTRACT : 550/9609.02.2023 NUMAR PROIECT : 556	FAZA PROIECT PROIECT TEHNIC REST DE EXECUTAT Data : 03.2023 VERIFICATOR TEHNIC	Manager de Proiect Ing. Silvan Moldovan Sef Echipa Proiectare Ing. Raul Cocs Inginer Proiectant Poduri Ing. Attila Takacs Inginer Proiectant Drumuri Ing. Valentin Oaida	REVIZII			DENUMIRE PLANSA PODET km 0+031 Intersectie cu DC88 Banda viraj 2 ST KM 18+500 Scara : 1:50 NUMAR PLANSA 556-VOTM-PO-46
						NR. REV.	DATA	SEMN.	